



## Preparing the Radio Microphone for use

The 1985 Handheld Radio Microphone incorporates a transmitter powered by a 9 volt battery (supplied).




- 1 Prior to fitting the battery ensure that, if fitted, the small rubber insulating cap has been removed from the positive (+) terminal of the battery.

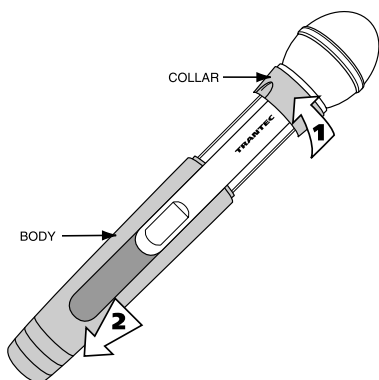

- 2 To fit the battery, twist the microphone collar in the direction indicated by Arrow 1 (shown above).


Carefully pull the microphone body down (see arrow 2, above) to reveal the battery chamber.

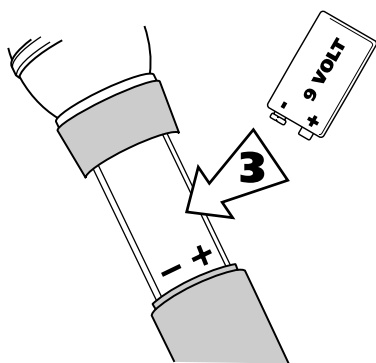


- 3 Fit the battery, noting the correct location of the battery terminals.
- 4 Push the body back up into the closed position and twist the collar to lock the body in place.

## Switching on the Radio Microphone

A switch is located at the base of the radio microphone.



With the switch pushed to the RIGHT, the radio microphone is switched OFF.




With the switch pushed to the LEFT, the radio microphone is switched ON.

*A red LED glows next to the battery icon to indicate that the microphone is switched on.*

The Radio Microphone is now ready for use.

## Checking the Frequency of the Radio Mic



A label fitted inside the battery compartment lists the frequency (in Megahertz) and Serial Number of the radio microphone.

Ensure that the radio microphone frequency is the same as the receiver. If necessary, check the receiver to confirm its frequency.

## Useable Distance

**Outside:** In ideal conditions the radio microphone will operate up to 100 meters from the receiver. Note that metal obstructions placed between the microphone and the receiver will impede performance.

**Indoors:** Building structure can affect performance. Dense material, particularly steel beams, can interfere with the signal, so it will be worth experimenting to get the best results by positioning the receiver at a location most "visible" to the microphone user.

Note: Two radio microphones of the same frequency will not operate together - one will cancel the other out. With this in mind, please inform us of the frequency of your existing radio microphone should you wish to order a second radio microphone system.